





FlexScan[®]
Business Enterprise Monitor Solutions




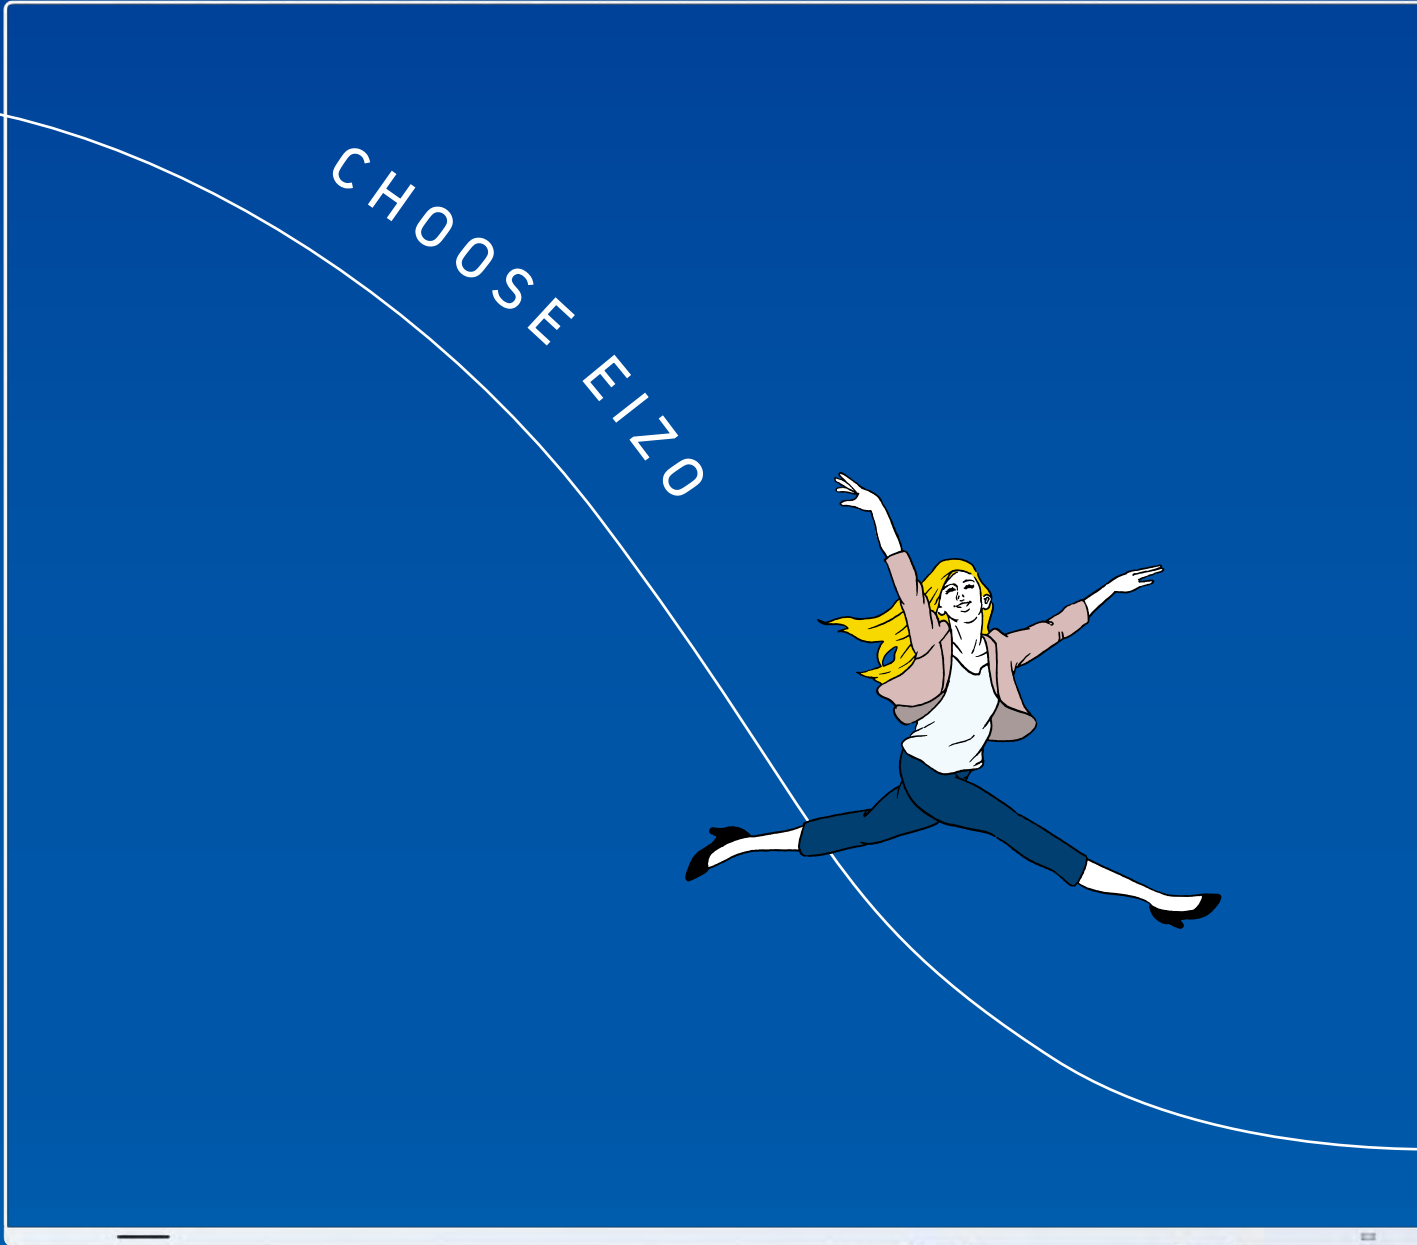


CHOOSE EIZO WORK BETTER

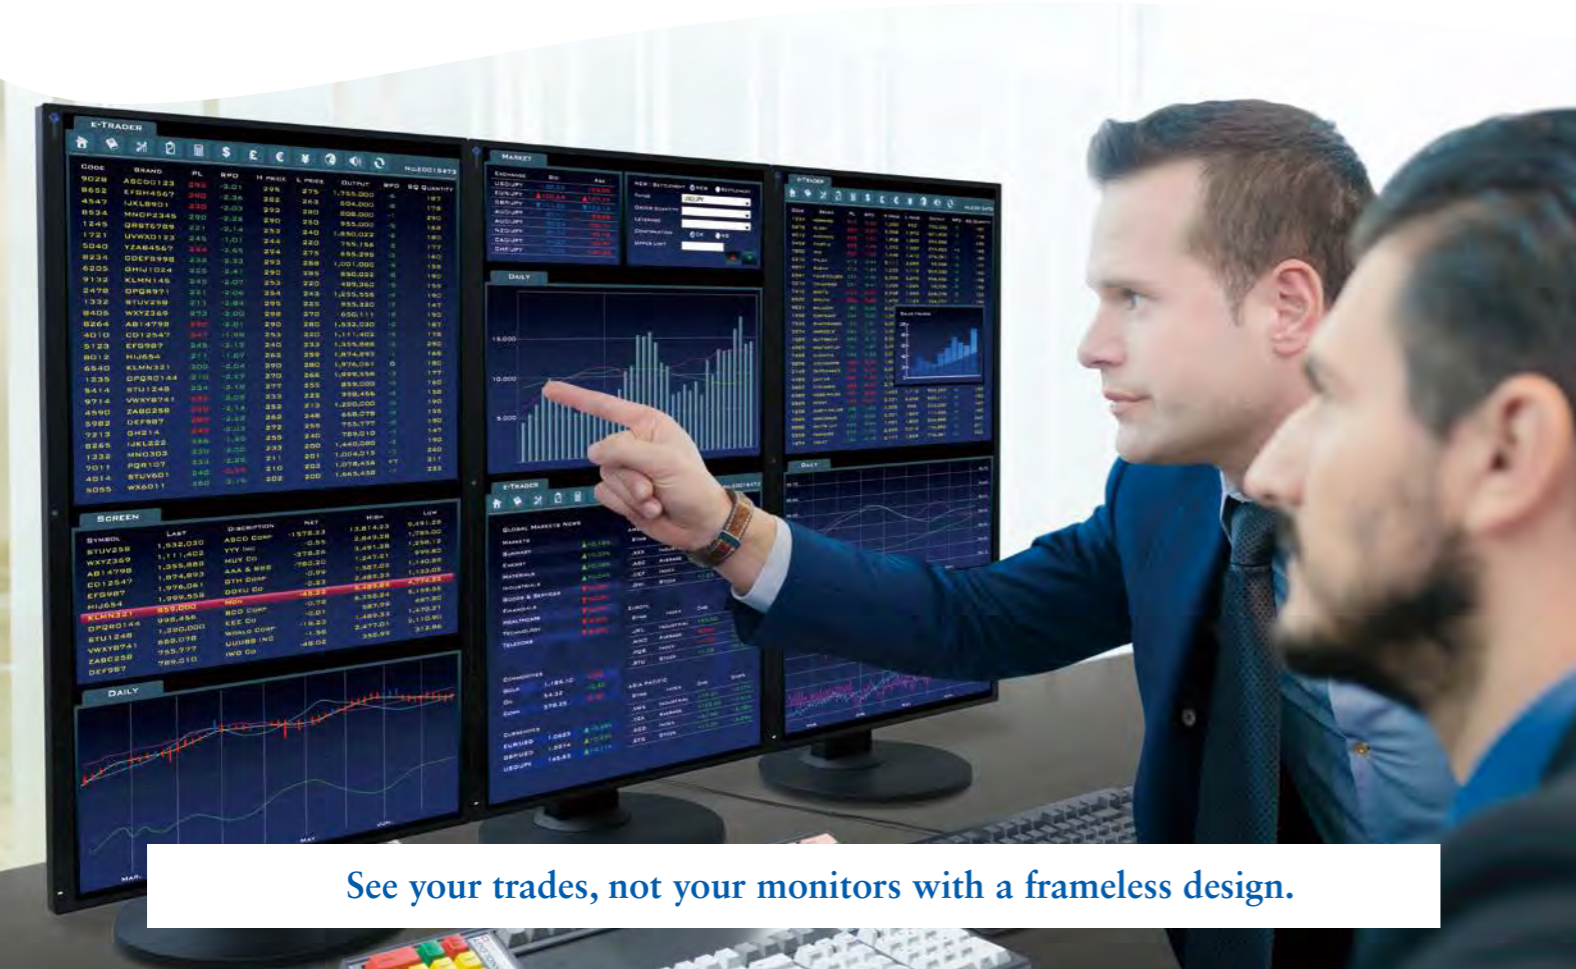


See your trades, not your monitors with a frameless design.

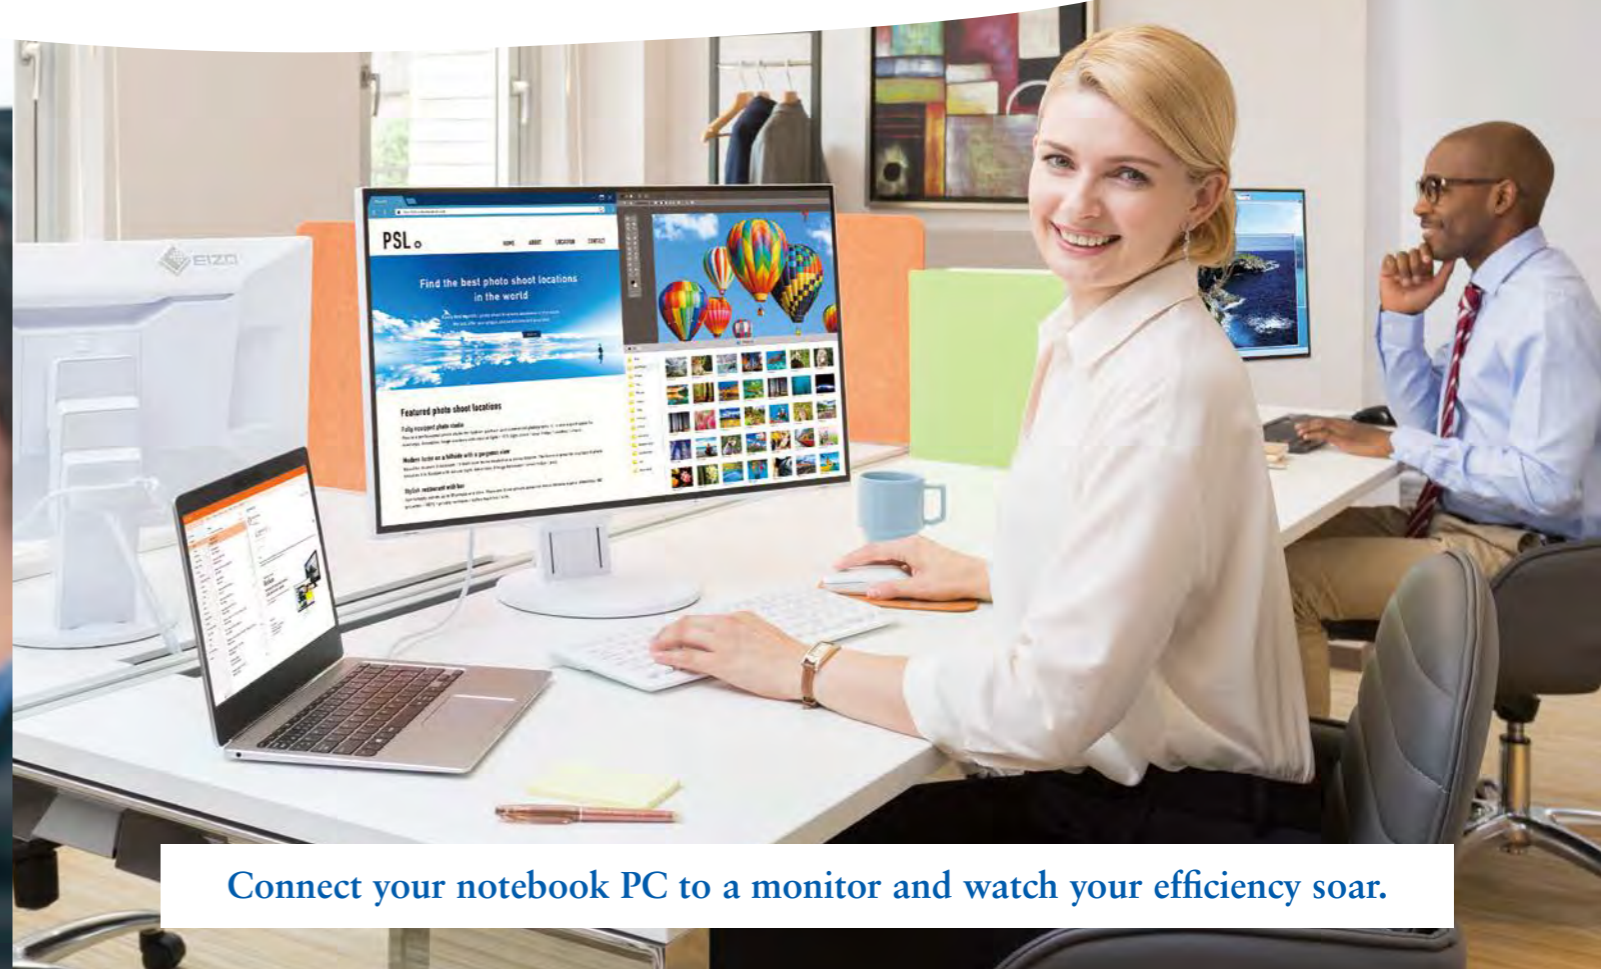

Connect your notebook PC to a monitor and watch your efficiency soar.

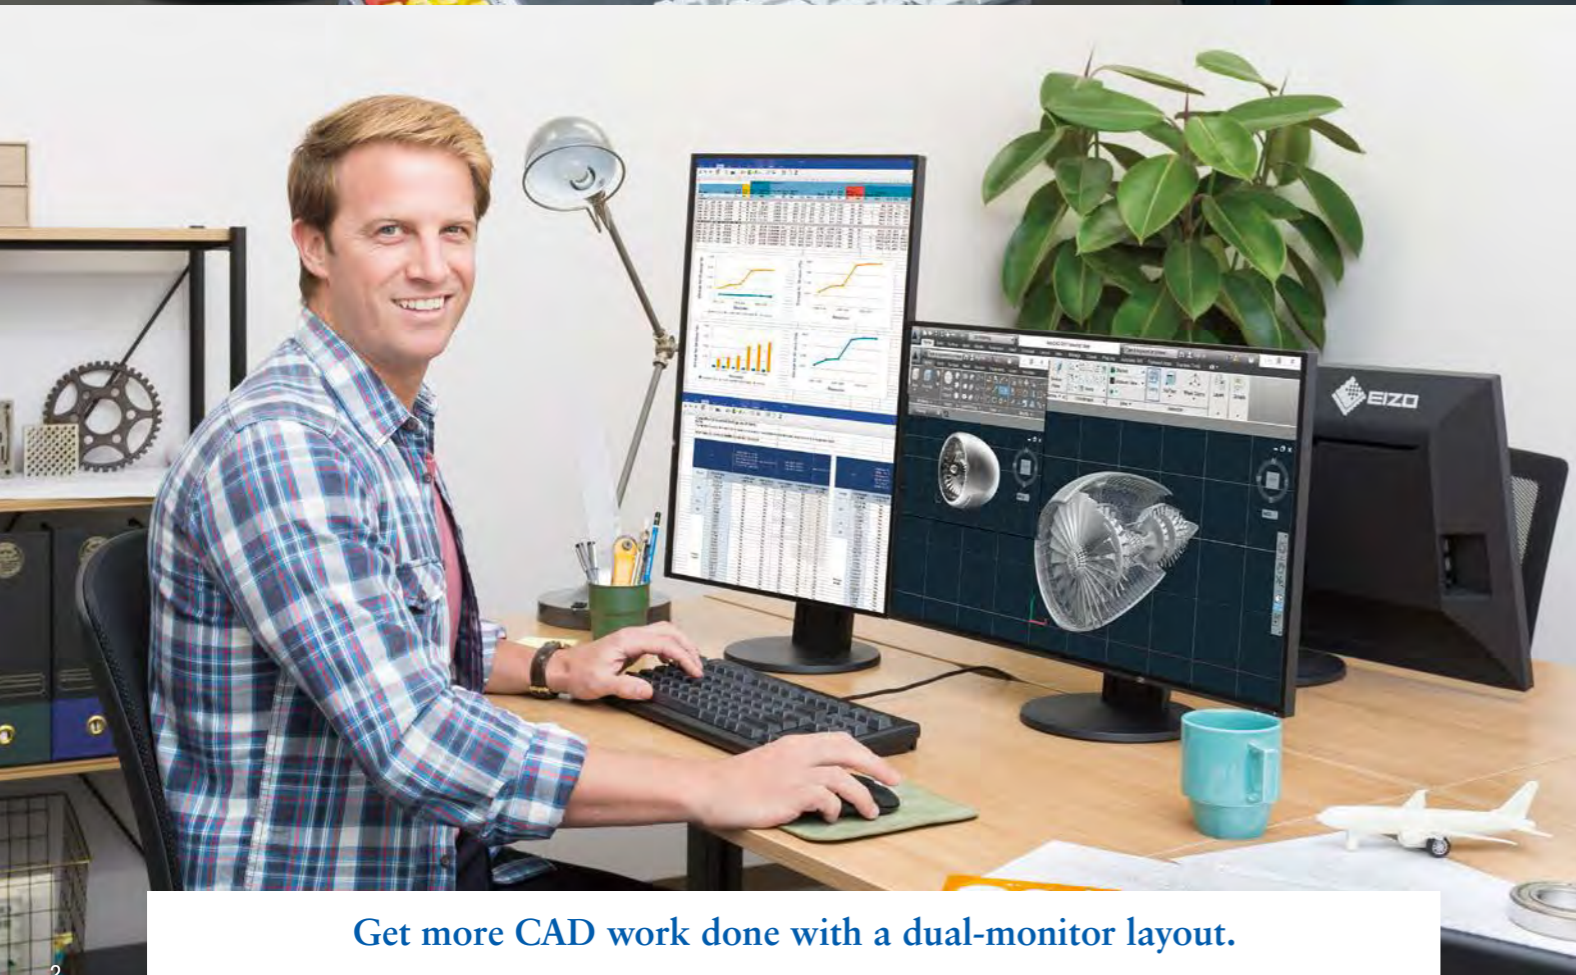



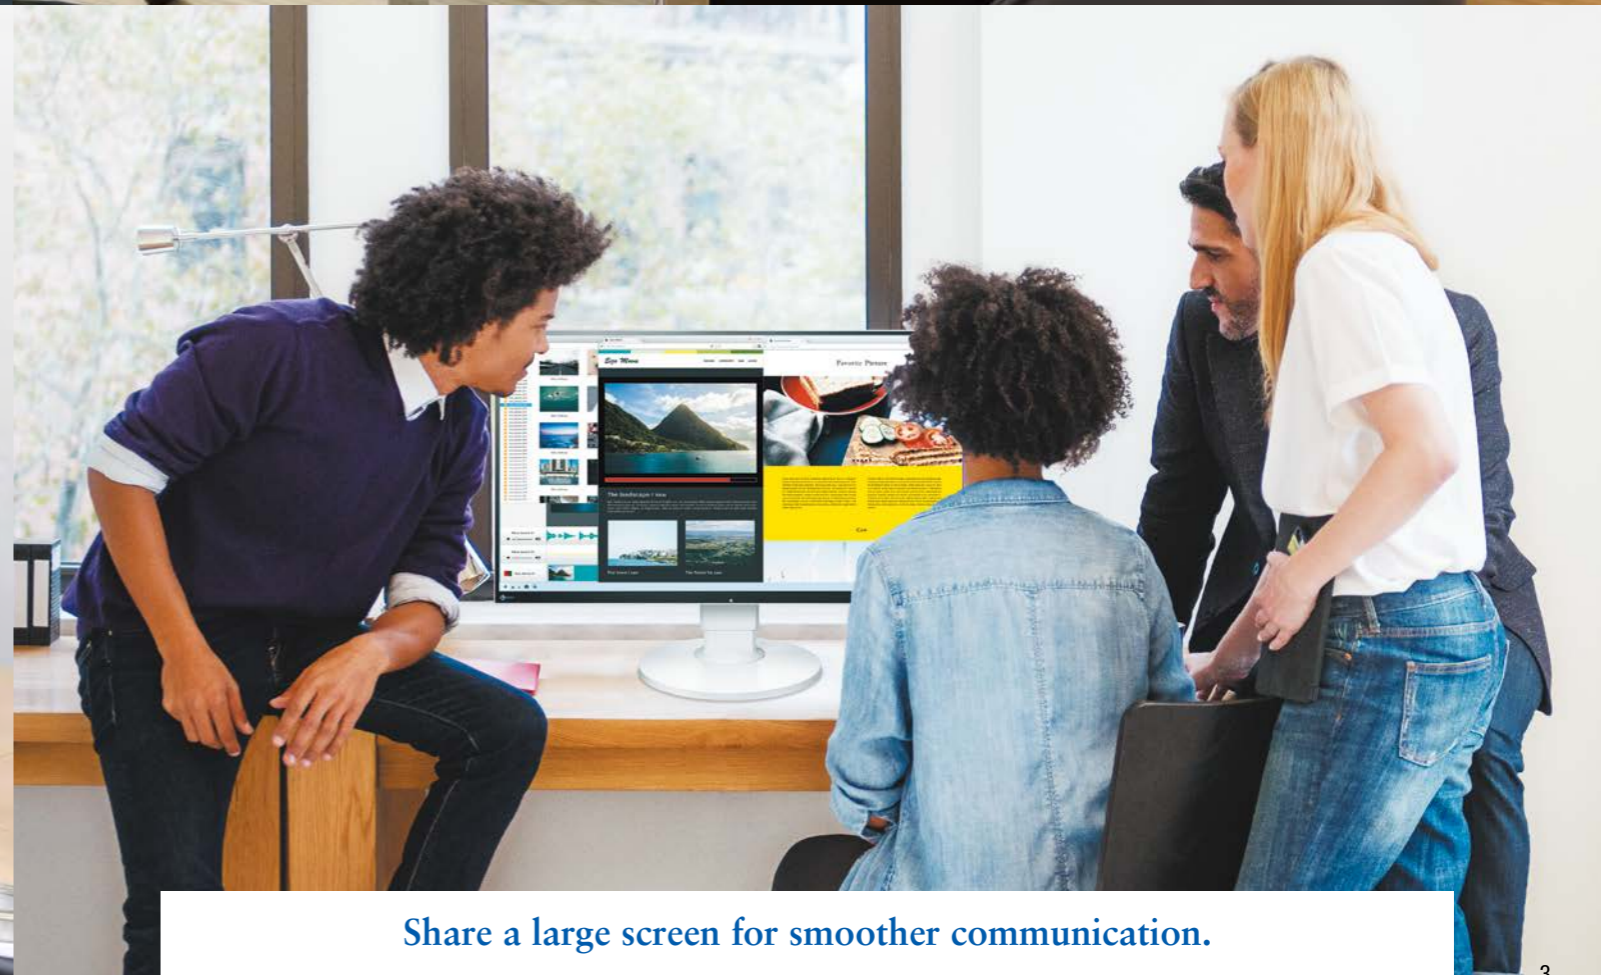



Get more CAD work done with a dual-monitor layout.






Share a large screen for smoother communication.






Frameless

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
NEW EV3285  4K  ■ Black □ White	31.5"	3840 × 2160	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort 1.2 HDMI × 2	USB Type-C (2 m) DisplayPort (2 m) HDMI (2 m)
EV2785  4K  ■ Black □ White	27"	3840 × 2160	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort 1.2 HDMI × 2	USB Type-C (2 m) DisplayPort (2 m) HDMI (2 m)
EV2780   ■ Black □ White	27"	2560 × 1440	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort HDMI	USB Type-C (2 m)
EV2750  ■ Black □ White	27"	2560 × 1440	IPS	178°/178°	350 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI	DisplayPort (2 m)
EV2456  ■ Black □ White	24.1"	1920 × 1200	IPS	178°/178°	350 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DisplayPort (2 m)
EV2451  ■ Black □ White	23.8"	1920 × 1080	IPS	178°/178°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DisplayPort (2 m)
EV2450  ■ Black ■ Gray □ White	23.8"	1920 × 1080	IPS	178°/178°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DisplayPort (2 m)

Wide

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
NEW EV2430  ■ Black ■ Gray	24.1"	1920 × 1200	IPS	178°/178°	300 cd/m ²	14 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) DisplayPort (2 m)
EV2316W  ■ Black ■ Gray	23"	1920 × 1080	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) DisplayPort (2 m)
EV2216W  ■ Black ■ Gray	22"	1680 × 1050	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) DisplayPort (2 m)

Square

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV2730Q  ■ Black ■ Gray	26.5"	1920 × 1920	IPS	178°/178°	300 cd/m ²	5 ms	DVI-D 24 pin DisplayPort	Dual link DVI-D (2 m) DisplayPort (2 m)
S2133  ■ Black ■ Gray	21.3"	1600 × 1200	IPS	178°/178°	420 cd/m ²	6 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1934  ■ Black ■ Gray	19"	1280 × 1024	IPS	178°/178°	250 cd/m ²	14 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1703-A  ■ Black ■ Gray	17"	1280 × 1024	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1503-A  ■ Black ■ Gray	15"	1024 × 768	TN	160°/160°	400 cd/m ²	8 ms	DVI-D 24 pin D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)



Function and Beauty

Frameless, fully flat design



Frameless


Bezels that are Barely There

These monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.

Fully Flat

Minimalist Front Surface Design

EIZO's no-compromises approach to design and functionality ensures the switches on the front of the monitor are easy to operate. Even with the minimalist front bezel, we achieved a flat, frameless design which incorporates an auto brightness sensor along with power and setting control switches by miniaturizing all these components.

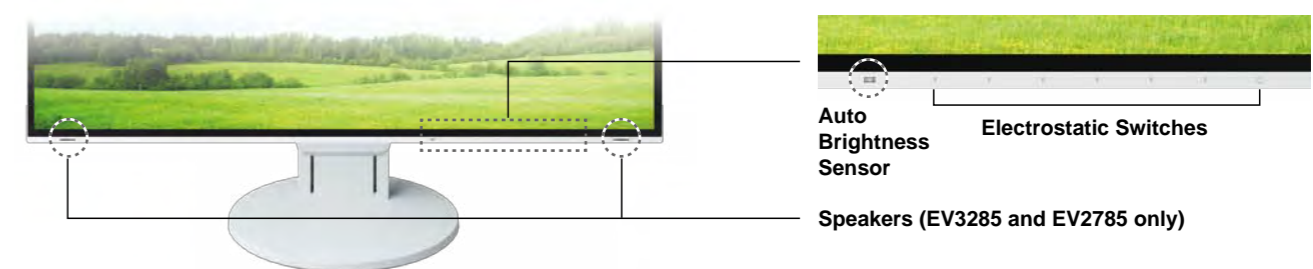


Beautiful from Front to Back

White Cables for a White Cabinet

The aesthetically-pleasing design of the monitor extends to the cables. White cables come bundled with the white cabinet option of the EV3285, EV2785, EV2780, EV2456, and EV2451.

Cable Management

To keep your desktop tidy, both a cable holder and a cable cover are included with the EV3285, EV2785, EV2456, and EV2451.

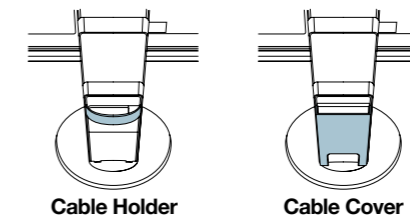

Frameless Models

EV3285



4K (3840 x 2160)

EV2785



4K (3840 x 2160)

EV2780



WQHD (2560 x 1440)

EV2750



WQHD (2560 x 1440)

EV2456



WUXGA (1920 x 1200)

EV2451



FULL HD (1920 x 1080)





Say Goodbye to Tired Eyes

Blue Light Reduction

Paper Mode

Do you find that your screen is often too bright to read text for long periods of time? FlexScan monitors are equipped with 'Paper Mode' which adjusts your screen to look just like paper, making it less jarring on your eyes. It reduces the amount of blue light being emitted from your monitor, and makes the screen a warm, easy to read color. When used in conjunction with the Auto EcoView function, blue light can be even further reduced.


- Brightness
- Contrast Ratio
- + Low Color Temperature

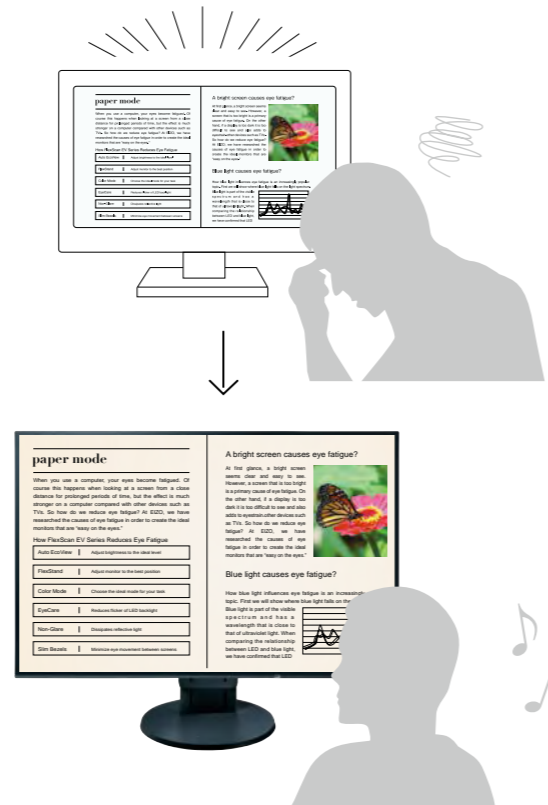

Auto Brightness Control

Always the Ideal Brightness with Auto EcoView

The Auto EcoView function automatically adjusts the brightness of your monitor screen to match the ambient lighting, meaning that your monitor is always at the optimal brightness. This is helpful for reducing eye fatigue as your eyes aren't straining to see the monitor.

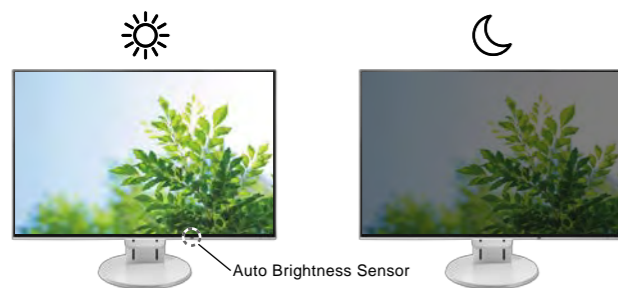

Flicker-Free Viewing

EyeCare Dimming Mode

In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.


FlexScan monitors are certified by TÜV Rheinland to have low blue light and be flicker-free.



Stable Image Even on a Dark Screen

Reduce Brightness to Approximately 1 cd/m²


Frameless and Wide monitors can be adjusted to a brightness approximately 1 cd/m² without affecting the color or stability of the display.

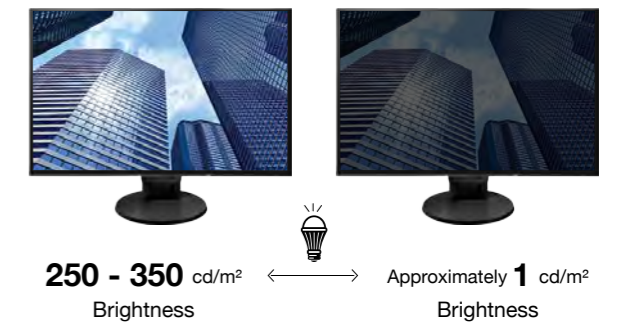

Glare Reduction

Anti-Glare Coating

FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

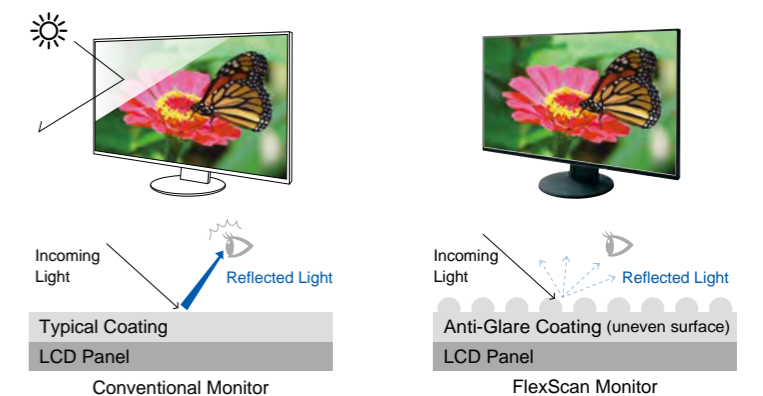

Visit Our Website

"The Latest on Computer Screens and Eye Fatigue"





Intelligent Software to Work Better

SCREEN INSTYLE

With EIZO'S free Screen InStyle software automatically optimize your monitor to make your user environment more comfortable.

Compatible Models	EV3285 / EV2785 / EV2780 / EV2750 / EV2456 / EV2451 / EV2450
Compatible OS	Windows 10(32-bit,64-bit) / 8.1(32-bit,64-bit) / 7(32-bit,64-bit)



Auto Color Mode

Automatically Change the Color Mode for Each Application


FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.



Easily Switch Between Input Signals

Assign Hotkeys for Switching Input Signals


When you have two PCs connected to your monitor, switch between them with just your keyboard.

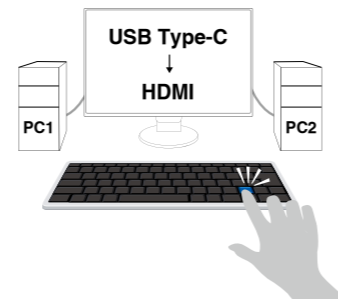

Circadian Dimming

Sleep Better with Automatic Blue Light Control

The Circadian Dimming function automatically changes the color temperature of your monitor as the day progresses. Maintain your body's natural circadian rhythm by setting the monitor to gradually reduce blue light during the evening, helping you sleep easier.

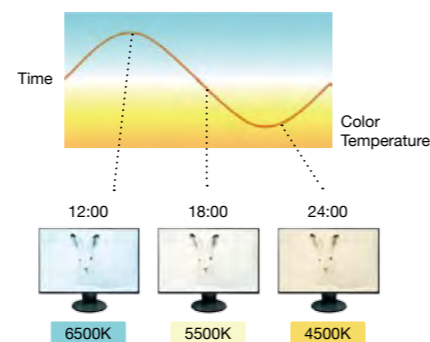

Visit Our Website


"Sleep Tight with Less Blue Light" >>>



Multi-Monitor Convenience


Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

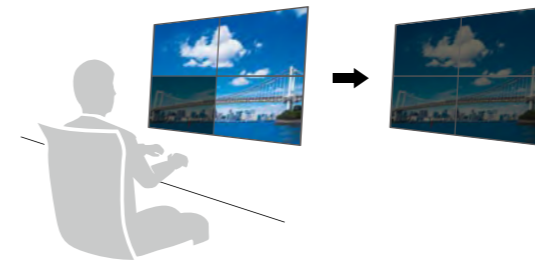

On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

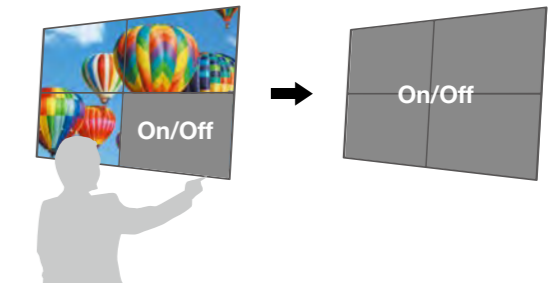


Screen InStyle Server

Effectively Monitor Asset Management

Automatically Receive Monitor or PC Information


With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.

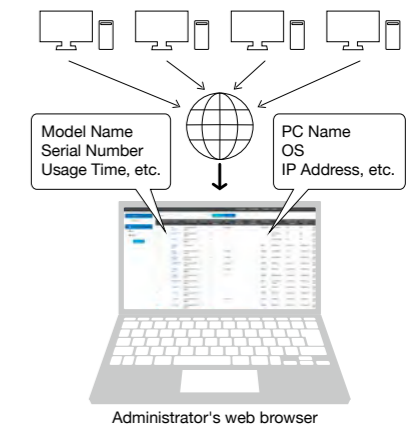

Control Settings on Multiple Monitors at Once


Manage Multiple Monitors from One Location

Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.



Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

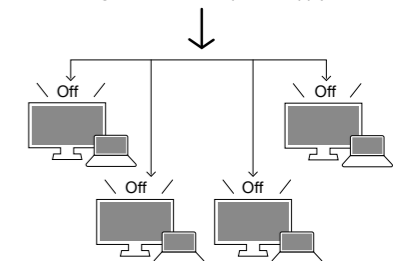

Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This is helpful when users forget to lock their PCs before leaving their desks.

Download Screen InStyle and Screen InStyle Server Free >>>



Work Big, Comfortably

Make the Most of a Big Screen

PbyP Picture by Picture

Display multiple video signals side by side on the same screen.


Compatible Models EV3285 / EV2785 / EV2780 / EV2750



PinP Picture in Picture

Display a secondary input signal in the corner of the screen.

Compatible Models EV3285

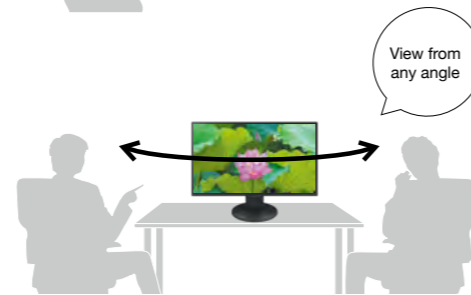

The Beauty of IPS Panels


When viewing images on large screens, colors can appear differently across the screen depending on your viewing angle. EIZO's frameless monitors adopt IPS panels which have wide viewing angles and excellent color reproduction. From below, above or rotated — colors will be displayed clearly at any angle.

One Cable Connection

USB Type-C Compatible

With the EV3285, EV2785 and EV2780, you can connect a USB Type-C compatible notebook PC with a single cable, transmitting audio and video, and supplying power to the notebook.

※When a power supply exceeding 15 watts is supplied from the EV2780, the monitor brightness is limited to 120 cd/m².

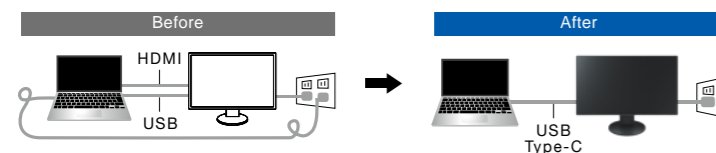

Compatible Models EV3285 / EV2785 / EV2780



Visit Our Website

Infographic: "What is USB Type-C?"



The Perfect Position



Versatile Stand

The stands feature height adjustment, tilt and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.

The specific movement ranges of stands varies by model. Check the specifications on P18 - P21.




For the EV2456

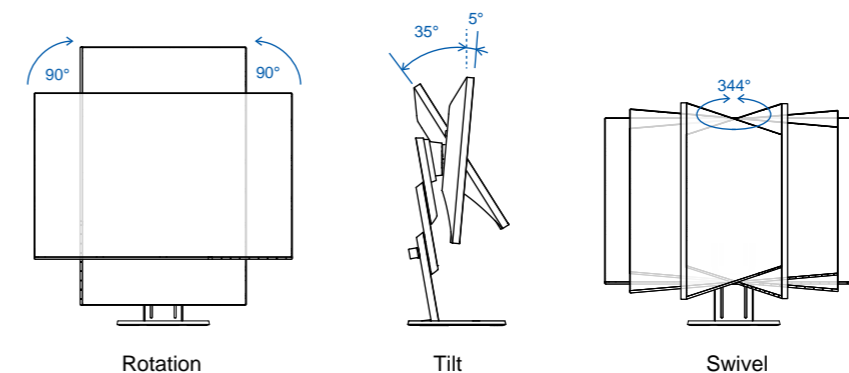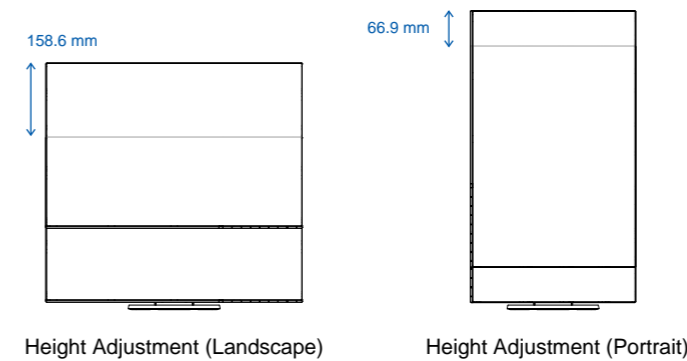

Wide Height Adjustment Range

Position the monitor to a height that allows you to work without tiring.


The S1503-A is not height adjustable.

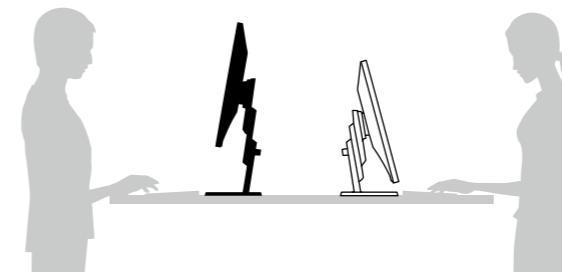

Use in Portrait or Landscape

View web pages and documents more easily by switching the monitor to portrait mode simply by rotating the screen.

EV3285, EV2730Q, S1934, S1703-A, and S1503-A do not support rotation. PC settings are required to change the direction of the display.

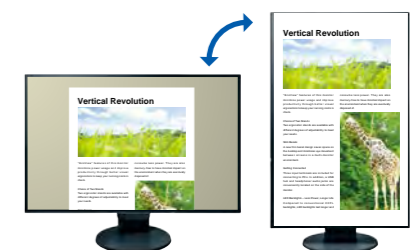


Free Up Your Workspace



PCSK-03 Stand Bracket

The PCSK-03 is a VESA-compliant bracket for easily mounting a client terminal such as a thin client or mini PC to the back of the monitor's stand. The space the client terminal previously occupied is now freed up so you can make better use of your desktop. Even with the client terminal attached you can adjust the monitor's stand freely.

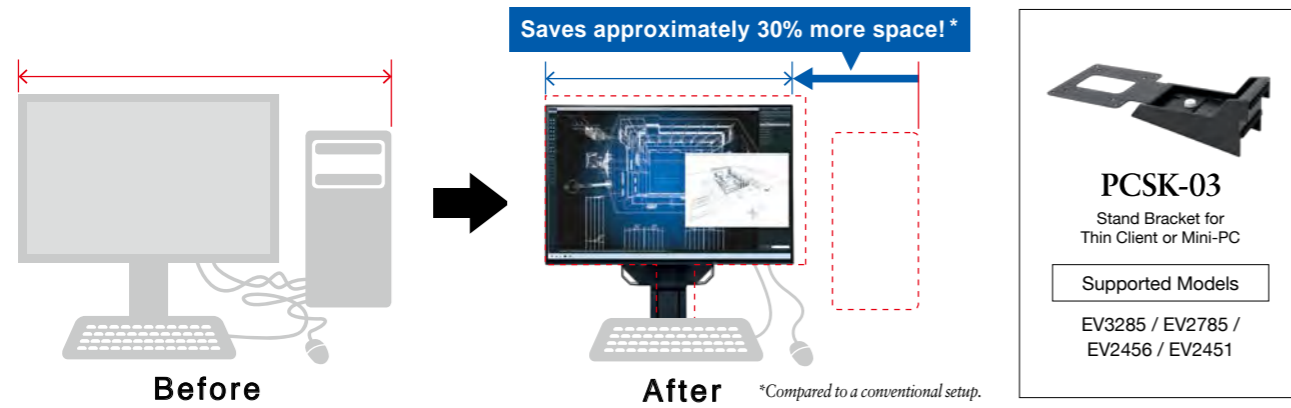

Match Accessories from Front to Back

The bracket comes in both white and black to match the color of your monitor cabinet and cables.



Safe to Use with Various Client Terminals

The stand has been tested with several companies' client terminals, even in multi-monitor environments. When installed correctly the bracket does not interfere with the balance of the monitor so that even a heavy client terminal will not cause your monitor to overbalance.



Visit Our Website

"PCSK-03 Stand Bracket"



Be Eco Friendly — It's a Breeze

Automatically Reduce Power Consumption

Brightness Control with Auto EcoView

Auto EcoView automatically controls the brightness of the monitor to match ambient lighting. No more fiddling with brightness settings throughout the day, simply turn Auto EcoView on and save power while maintaining optimal visibility.



Control the Backlight with EcoView Optimizer 2

Save more power with EcoView Optimizer 2, which reduces the brightness of the backlight according to the content being displayed, all while maintaining maximum visibility. Excludes EV2730Q, S1934, S1703-A, and S1503-A.



Auto EcoView + EcoView Optimizer 2



Certified Savings

EIZO's FlexScan monitors are certified for visual ergonomics and energy savings. All Frameless and Wide FlexScan models are TCO Displays 7 and EPA Energy Star certified, with the EV2451 and EV2456 earning the EU Energy Label's maximum rating of A++.

The monitors* have EPEAT Gold ratings, and all monitors are TÜV Rheinland certified.



Centrally Manage Energy Consumption

Screen InStyle Server

With Screen InStyle Server, centrally control the powering off of all monitors connected to the PC network. Conserve energy without relying on each user to turn monitors off after use.

See P11 for more details



Five-Year & Zero Bright Pixels Warranty

Five-Year Warranty

A 5-year manufacturer's warranty covers all components including the LCD panel to ensure a long service life.

Usage time is limited to 30,000 hours.



Zero Bright Pixels

EIZO guarantees zero bright sub-pixels for six months from the purchase date.

Applies to Frameless monitors, EV3237 and EV2780Q



Accessories

Wall Mount Arm

The LA-011-W is a single-axis arm with a minimum profile and tilt/swivel.

Supported Monitors: EV3285, EV2785, EV2780, EV2750, EV2730Q, S2133



Dual Height Adjustable Stand

Mount two monitors in either portrait or landscape orientation. Height is adjustable in six stages and cable housing in the back of the stand contributes to a clutter-free desktop.

Supported Monitors: S2133, S1934, S1703-A



Protection Panels

These panels protect against dust and scratches. They come in reversible glossy and non-glare sides.

Supported Monitors: All Wide and Square monitors on pages 20 - 21.



Screen Cleaner Kit

Keep your screen free from dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth.



UTILITY SOFTWARE

Power Management for Enterprises

EIZO EcoView NET helps organizations take advantage of the ergonomic and energy-saving features of EIZO monitors by allowing a network administrator to adjust the brightness and power settings from a central location.


Monitor Control Utility

Screen InStyle is software for managing single or multi-monitor configurations. See pages 10 - 11 for details.

Monitor Control for Systems Administrators

EIZO Monitor Configurator lets administrators control the settings of all FlexScan EV monitors with a USB connection. Settings can be saved as an xml file and applied to other monitors.

Read about some of the organizations that use FlexScan and why.

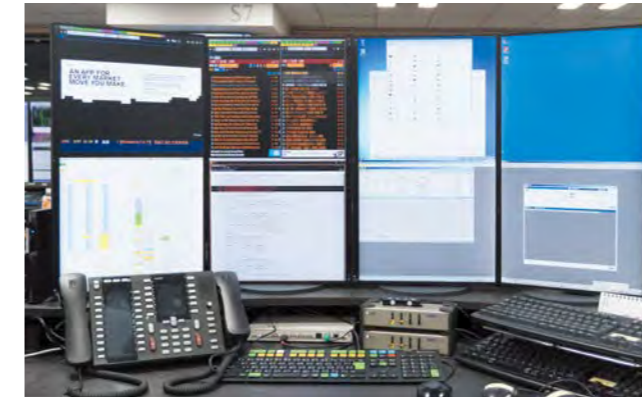

Mizuho Securities

Country: Japan / Product Deployed: FlexScan EV2750

Mizuho Securities replaced their previous desk installation of eight 19-inch square LCD monitors which were positioned on arm mounts, with four 27-inch FlexScan EV2750 monitors. EIZO's highly flexible stand allowed Mizuho Securities to adjust the height and rotate the screens into portrait mode without needing arm mounts. Furthermore, with the EV2750's picture-by-picture function, they were able to secure eight unique display areas on only four screens.



Festo

Country: Germany / Product Deployed: FlexScan EV2450

Festo is a global manufacturer of process control and factory automation technology. They use two FlexScan monitors at each work station in their new 12,000 square meter Automation Center at the Esslingen site in Germany. The narrow bezel makes the monitor look almost frameless in the dual-screen solution. In addition, it has a good price-performance ratio and a five-year guarantee spanning the product's entire service life.



Zuiderzeeland Regional Water Authority

Country: The Netherlands / Product Deployed: FlexScan EV2450

The Zuiderzeeland Regional Water Authority provides clean and sufficient water with dikes, pumping stations, and wastewater treatment plants throughout Flevoland Province, the Netherlands. The Water Authority chose to use the FlexScan EV2450 for office work, CAD drawing and Geoweb administration. Since installing the monitors they have saved over 50% in electrical costs.



Tobii Pro


Country: Sweden / Product Deployed: FlexScan EV2451

Tobii Pro is the leading provider of research solutions and services designed to deepen understanding of human behavior. They use the FlexScan EV2451 with their eye-tracking solutions to display image and video stimuli that serves as a high-end research tool for both academia and commercial researchers. In addition to high-image quality, the monitor's sleek design is almost non-intrusive for the user.

FlexScan




Model Variations	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand
Cabinet Color	White, Black	White, Black	White, Black
Panel	IPS	IPS	IPS
Backlight	LED	LED	LED
Size	31.5" / 80 cm	27" / 68.5 cm	27" / 68.5 cm
Native Resolution	3840 x 2160 (16:9 aspect ratio)	3840 x 2160 (16:9 aspect ratio)	2560 x 1440 (16:9 aspect ratio)
Display Size (H x V)	697.3 x 392.2 mm	596.7 x 335.7 mm	596.7 x 335.7 mm
Pixel Pitch	0.182 x 0.182 mm	0.155 x 0.155 mm	0.233 x 0.233 mm
Display Colors	16.77 million	16.77 million	16.77 million
Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°
Brightness (typical)	350 cd/m ²	350 cd/m ²	350 cd/m ²
Contrast Ratio (typical)	1300:1	1300:1	1000:1
Response Time (typical)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
Input Terminals	USB Type-C x 1 (with HDCP ¹), DisplayPort 1.2 x 1 (with HDCP ¹), HDMI x2 (with HDCP)	USB Type-C x 1 (with HDCP ¹), DisplayPort 1.2 x 1 (with HDCP ¹), HDMI x 2 (with HDCP)	USB Type-C x 1 (with HDCP), DisplayPort x 1 (with HDCP), HDMI x 1 (with HDCP)
Digital (H, V)	USB Type-C: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz, 29 - 31 Hz, and 49 - 61 Hz	USB Type-C: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz, 29 - 31 Hz, and 49 - 61 Hz	USB Type-C: 31 - 89 kHz, 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 29 - 31 Hz, 49 - 51 Hz and 59 - 61 Hz
Analog (H, V)	-	-	-
Sync Formats	-	-	-
USB	Function 1 port for upstream (USB Type-C) 2-port USB hub (including 1 USB battery charge port) Standard USB 3.1 Gen 1, USB BC 1.2	Function 1 port for upstream (USB Type-C) 2-port USB hub (including 1 USB battery charge port) Standard USB 3.1 Gen 1, USB BC 1.2	Function 1 port for upstream (USB Type-C) 2-port USB hub Standard USB 3.1 Gen 1
Audio	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm headphone jack Sound Adjustment Volume	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm headphone jack Sound Adjustment Volume	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm headphone jack Sound Adjustment Volume
Power	Power Requirements AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption 163 W Typ. Power Consumption 32 W Power Save Mode 0.5 W or less	Power Requirements AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption 163 W Typ. Power Consumption 31 W Power Save Mode 0.5 W or less	Power Requirements AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption 96 W Typ. Power Consumption 23 W Power Save Mode 0.5 W or less
Features & Functions	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView Yes EcoView Sense -	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView Yes EcoView Sense -	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2) Auto EcoView Yes EcoView Sense -
Physical Specifications	Dimensions (W x H x D) 717.4 x 427.3 - 576.2 x 230 mm Dimensions (Without Stand, W x H x D) 717.4 x 416.3 x 51.5 mm Net Weight 11 kg / 24.3 lbs Net Weight (Without Stand) 7.6 kg / 16.8 lbs Height Adjustment Range 148.9 mm Tilt 35° Up, 5° Down Swivel 344° Pivot -	Dimensions (W x H x D) 611.4 x 367.3 - 545.2 x 230 mm Dimensions (Without Stand, W x H x D) 611.4 x 356.3 x 50 mm Net Weight 8.2 kg / 18.1 lbs Net Weight (Without Stand) 4.9 kg / 10.8 lbs Height Adjustment Range 177.9 mm Tilt 35° Up, 5° Down Swivel 344° Pivot 90° (clockwise)	Dimensions (W x H x D) 611.6 x 390.2 - 545.2 x 245 mm Dimensions (Without Stand, W x H x D) 611.6 x 359 x 48.5 mm Net Weight 8.1 kg / 17.9 lbs Net Weight (Without Stand) 5.3 kg / 11.7 lbs Height Adjustment Range 155 mm Tilt 35° Up, 5° Down Swivel 344° Pivot 90° (both clockwise and counter clockwise)
Hole Spacing (VESA Std.)	100 x 100 mm	100 x 100 mm	100 x 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade3, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low blue light content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)	AC power cord, signal cable (USB Type-C - USB Type-C, DisplayPort - DisplayPort, HDMI - HDMI), cable cover, Screw for VESA mount x4, setup guide	AC power cord, signal cable (USB Type - C - USB Type - C, DisplayPort - DisplayPort, HDMI - HDMI), setup guide, cable cover	AC power cord, signal cable (USB Type - C - USB Type-C), CD-ROM (PDF user's manual), setup guide
Warranty	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	Yes	Yes

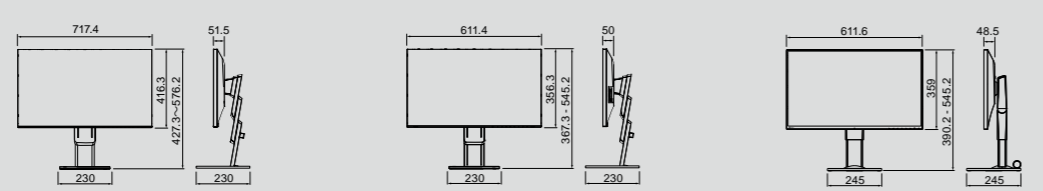

Frameless



Model Variations	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand
Cabinet Color	White, Black	White, Black	White, Black	White, Gray, Black
Panel	IPS	IPS	IPS	IPS
Backlight	LED	LED	LED	LED
Size	27" / 68.5 cm	24.1" / 61.1 cm	23.8" / 60.4 cm	23.8" / 60 cm
Native Resolution	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16: 9 aspect ratio)	1920 x 1080 (16: 9 aspect ratio)
Display Size (H x V)	596.7 x 335.7 mm	518.4 x 324 mm	527 x 296.5 mm	527 x 296.5 mm
Pixel Pitch	0.233 x 0.233 mm	0.270 x 0.270 mm	0.275 x 0.275 mm	0.275 x 0.275 mm
Display Colors	16.77 million	16.77 million	16.77 million	16.77 million
Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°	178°, 178°
Brightness (typical)	350 cd/m ²	350 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio (typical)	1000:1	1000:1	1000:1	1000:1
Response Time (typical)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
Input Terminals	DisplayPort x 1 (with HDCP), DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)
Digital (H, V)	DVI: 31 - 89 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 49 - 61 Hz	DVI: 31 - 76 kHz, 59 - 61 Hz DisplayPort: 31 - 76 kHz, 59 - 61 Hz HDMI: 15 - 76 kHz, 49 - 51 Hz and 59 - 61 Hz	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 51 Hz and 59 - 61 Hz	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 61 Hz
Analog (H, V)	-	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz
Sync Formats	-	Separate	Separate	Separate
USB	Function 1 port for monitor control 2-port USB hub Standard USB 3.0	Function 1 port for monitor control 2-port USB hub Standard USB 3.0	Function 1 port for monitor control 2-port USB hub Standard USB 3.0	Function 1 port for monitor control 2-port USB hub Standard USB 3.0
Audio	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm stereo jack 3.5 mm headphone jack Sound Adjustment Volume, Source (DisplayPort, HDMI)	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm stereo jack 3.5 mm headphone jack Sound Adjustment Volume, Source (DisplayPort, HDMI)	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm stereo jack 3.5 mm headphone jack Sound Adjustment Volume, Source (DisplayPort, HDMI)	Speakers 1.0 W +1.0 W Input Terminals - Output Terminals 3.5 mm stereo jack 3.5 mm headphone jack Sound Adjustment Volume, Source (DisplayPort, HDMI)
Power	Power Requirements AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption 67 W Typ. Power Consumption 22 W Power Save Mode 0.5 W or less	Power Requirements AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption 44 W Typ. Power Consumption 11 W Power Save Mode 0.5 W or less	Power Requirements AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption 42 W Typ. Power Consumption 13 W Power Save Mode 0.5 W or less	Power Requirements AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption 44 W Typ. Power Consumption 11 W Power Save Mode 0.3 W or less
Features & Functions	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView Yes EcoView Sense -	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView Yes EcoView Sense -	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView Yes EcoView Sense -	Preset Modes Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView Yes EcoView Sense -
Physical Specifications	Dimensions (W x H x D) 611.6 x 390.2 - 545.2 x 245 mm Dimensions (Without Stand, W x H x D) 611.6 x 359 x 48.5 mm Net Weight 7.9 kg / 17.4 lbs Net Weight (Without Stand) 5.1 kg / 11.2 lbs Height Adjustment Range 155 mm Tilt 35° Up, 5° Down Swivel 344° Pivot 90° (both clockwise and counter clockwise)	Dimensions (W x H x D) 531 x 351.4 - 510.1 x 190 mm Dimensions (Without Stand, W x H x D) 531 x 341.9 x 45.5 mm Net Weight 5.7 kg / 12.6 lbs Net Weight (Without Stand) 3.7 kg / 8.2 lbs Height Adjustment Range 158.6 mm Tilt 35° Up, 5° Down Swivel 344° Pivot 90° (both clockwise and counter clockwise)	Dimensions (W x H x D) 537.7 x 322.7 ³ - 495.4 x 190 mm Dimensions (Without Stand, W x H x D) 537.7 x 313.1 x 45.5 mm Net Weight 5.5 kg / 12.1 lbs Net Weight (Without Stand) 3.5 kg / 7.7 lbs Height Adjustment Range 172.7 mm Tilt 35° Up, 5° Down Swivel 344° Pivot 90° (both clockwise and counter clockwise)	Dimensions (W x H x D) 537.6 x 368 ³ - 473.5 x 233 mm Dimensions (Without Stand, W x H x D) 537.6 x 317.6 x 47.9 mm Net Weight 6.2 kg / 13.7 kg Net Weight (Without Stand) 3.8 kg / 8.4 lbs Height Adjustment Range 140 mm Tilt 35° Up, 5° Down Swivel 344° Pivot 90° (both clockwise and counter clockwise)
Hole Spacing (VESA Std.)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD - ROM (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD-ROM (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable (may not be supplied in some countries), EIZO LCD Utility Disk (PDF user's manual), setup guide
Warranty	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	Yes	Yes	Yes

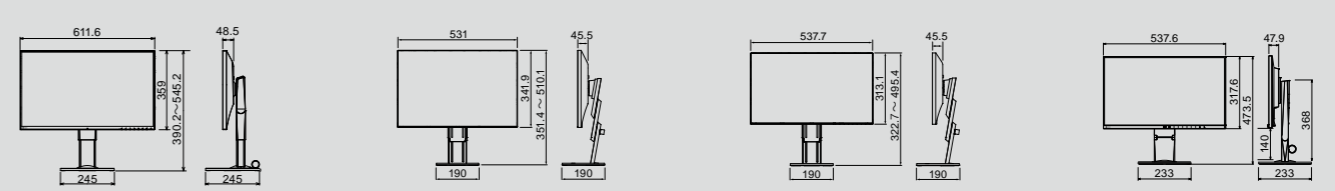

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ HDCP 2.2 is not supported. ² 6 months from the date of purchase. ³ The stand's height surpasses the screen.

FlexScan



NEW EV2430



EV2316W



EV2216W

Model Variations	-	-	-
Cabinet Color	Gray, Black	Gray, Black	Gray, Black
Panel	IPS	TN	TN
Backlight	LED	LED	LED
Size	24.1" / 61.1 cm	23" / 58 cm	22" / 56 cm
Native Resolution	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1680 x 1050 (16:10 aspect ratio)
Display Size (H x V)	518.4 x 324mm	509.8 x 286.7 mm	473.7 x 296.1 mm
Pixel Pitch	0.270 x 0.270 mm	0.265 x 0.265 mm	0.282 x 0.282 mm
Display Colors	16.77 million	16.77 million	16.77 million
Viewing Angles (H/V, typ.)	178°, 178°	170°, 160°	170°, 160°
Brightness (typical)	300 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio (typical)	1000:1	1000:1	1000:1
Response Time (typical)	5 ms (gray-to-gray)	5 ms (black-white-black)	5 ms (black-white-black)
Video Signals			
Input Terminals	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)
Digital (H, V)	31 - 76 kHz, 59 - 61 Hz	DisplayPort: 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68 kHz, 59 - 61 Hz	DisplayPort: 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68 kHz, 59 - 61 Hz
Analog (H, V)	31 - 76 kHz, 55 - 61 Hz	31 - 68 kHz, 55 - 61 Hz	31 - 68 kHz, 55 - 61 Hz
Sync Formats	Separate	Separate	Separate
USB			
Function	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub
Standard	USB 2.0	USB 2.0	USB 2.0
Audio			
Speakers	1.0 W +1.0 W	1.0 W +1.0 W	1.0 W +1.0 W
Input Terminals	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack
Output Terminals	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack
Sound Adjustment	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)
Power			
Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz
Max. Power Consumption	36 W	37 W	39 W
Typ. Power Consumption	12 W	10 W	12 W
Power Save Mode	0.3 W or less	0.3 W or less	0.3 W or less
Features & Functions			
Preset Modes	Color mode (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)
Auto EcoView	Yes	Yes	Yes
EcoView Sense	Yes	Yes	Yes
Physical Specifications			
Dimensions (W x H x D)	552.5 x 368 - 499 x 233 mm	540 x 368 ³ - 478.5 x 233 mm	500 x 368 ³ - 483.1 x 233 mm
Dimensions (Without Stand, W x H x D)	552.5 x 358 x 56.9 mm	540 x 317.5 x 56 mm	500 x 326.5 x 54 mm
Net Weight	6.7 kg / 14.8 lbs	5.9 kg / 13 lbs	5.6 kg / 12.3 lbs
Net Weight (Without Stand)	4.3 kg / 9.5 lbs	3.5 kg / 7.7 lbs	3.3 kg / 7.3 lbs
Height Adjustment Range	131 mm	140 mm	140 mm
Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down
Swivel	344°	344°	344°
Pivot	90° (clockwise)	90° (clockwise)	90° (clockwise)
Hole Spacing (VESA Std.)	100 x 100 mm	100 x 100 mm	100 x 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), setup guide, screw for VESA mount x4 (EV2430-F)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide
Warranty	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	-	-
Dimension Diagrams (Unit:mm)			

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ HDCP 2.2 is not supported. ² 6 months from the date of purchase. ³ The stand's height surpasses the screen.



EV2730Q



S2133



S1934



S1703-A



S1503-A

Model Variations	-	-	-	-	-
Cabinet Color	Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black
Panel	IPS	IPS	IPS	TN	TN
Backlight	LED	LED	LED	LED	LED
Size	26.5" / 67 cm	21.3" / 54 cm	19" / 48 cm	17" / 43.3 cm	15" / 38 cm
Native Resolution	1920 x 1920 (1:1 aspect ratio)	1600 x 1200 (4:3 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1024 x 768 (4:3 aspect ratio)
Display Size (H x V)	475.7 x 475.7 mm	432 x 324 mm	374.8 x 299.8 mm	337.9 x 270.3 mm	304.1 x 228.1 mm
Pixel Pitch	0.248 x 0.248 mm	0.270 x 0.270 mm	0.293 x 0.293 mm	0.264 x 0.264 mm	0.297 x 0.297 mm
Display Colors	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million
Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°	170°, 160°	160°, 160°
Brightness (typical)	300 cd/m ²	420 cd/m ²	250 cd/m ²	250 cd/m ²	400 cd/m ²
Contrast Ratio (typical)	1000:1	1500:1	1000:1	1000:1	600:1
Response Time (typical)	5 ms (gray-to-gray)	6 ms (gray-to-gray)	14 ms (gray-to-gray)	5 ms (black-white-black)	8 ms (black-white-black)
Video Signals					
Input Terminals	DisplayPort x 1 (with HDCP), DVI-D 24 pin x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin, DVI-D 24 pin	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1
Digital (H, V)	31 - 127 kHz, 59 - 61 Hz	31 - 76 kHz, 59 - 61 Hz	31 - 64 kHz, 59 - 61 Hz	31 - 64 kHz, 59 - 61 Hz	31 - 49 Hz, 59 - 61 Hz
Analog (H, V)	-	24 - 80 kHz, 49 - 76 Hz	31 - 64 kHz, 55 - 61 Hz	31 - 64 kHz, 55 - 61 Hz	31 - 49 kHz, 55 - 61 kHz
Sync Formats	-	Separate, Composite	Separate	Separate	Separate
USB					
Function	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub	-	-	-
Standard	USB 2.0	USB 2.0	-	-	-
Audio					
Speakers	1.0 W +1.0 W	-	0.5 W + 0.5 W	0.5 W + 0.5 W	0.5 W + 0.5 W
Input Terminals	3.5 mm stereo jack	-	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack
Output Terminals	3.5 mm headphone jack	-	3.5 mm headphone jack	3.5 mm headphone jack	-
Sound Adjustment	Volume, Power Save, Source (DisplayPort)	-	Volume, Source (DisplayPort)	Volume	Volume
Power					
Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz
Max. Power Consumption	64 W	45 W	21 W	25 W	16 W
Typ. Power Consumption	25 W	13 W	9 W	8 W	5 W
Power Save Mode	0.5 W or less	0.3 W or less	0.5 W or less	0.5 W or less	0.5 W or less
Features & Functions					
Preset Modes	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	Color mode (Paper, sRGB, User1, User2, DICOM)	User1, User2, sRGB, Paper	User1, User2, sRGB, Paper
Auto EcoView	Yes	Yes	Yes	Yes	Yes
EcoView Sense	Yes	Yes	-	-	-
Physical Specifications					
Dimensions (W x H x D)	497 x 512.5 - 613.5 x 245 mm	465 x 453 - 535 x 208.5 mm	With Height Adjustable Stand: 405 x 406.5 - 506.5 x 205 mm With Tilt Stand: 405 x 414 x 205 mm	With Height Adjustable Stand: 367 x 391.5 - 491.5 x 205 mm With Tilt Stand: 367 x 384 x 188 mm	346 x 349 x 157 mm
Dimensions (Without Stand, W x H x D)	497 x 501.5 x 56 mm	465 x 361 x 64 mm	405 x 334 x 61.5 mm	367 x 304 x 59 mm	346 x 280 x 69 mm
Net Weight	7.1 kg / 15.7 lbs	8.6 kg / 19 lbs	With Height Adjustable Stand: 5.6 kg / 12.3 lbs With Tilt Stand: 4.6 kg / 10.1	With Height Adjustable Stand: 5.5 kg / 12.1 lbs With Tilt Stand: 4.4 kg / 9.7 lbs	4.7 kg / 10.4 lbs
Net Weight (Without Stand)	4.2 kg / 9.3 lbs	5.6 kg / 12.3 lbs	3.8 kg / 8.3 lbs	3.6 kg / 7.9 lbs	3.4 kg / 7.5 lbs
Height Adjustment Range	101 mm	82 mm	With Height Adjustable Stand: 100 mm With Tilt Stand: 0 mm	With Height Adjustable Stand: 100 mm With Tilt Stand: 0 mm	-
Tilt	35° Up, 5° Down	40° Up, 0° Down	With Height Adjustable Stand: 30° Up, 0° Down With Tilt Stand: 30° Up, 5° Down	With Height Adjustable Stand: 30° Up, 0° Down With Tilt Stand: 30° Up, 5° Down	30° Up, 0° Down
Swivel	344°	35° Right / 35° Left	With Height Adjustable Stand: 35° Right / 35° Left With Tilt Stand: 0°	With Height Adjustable Stand: 35° Right / 35° Left With Tilt Stand: 0°	-
Pivot	-	90° (clockwise)	With Height Adjustable Stand: 90° (clockwise) With Tilt Stand: -	With Height Adjustable Stand: 90° (clockwise) With Tilt Stand: -	-
Hole Spacing (VESA Std.)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)	TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, EAC	TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, D-Sub - D-Sub), USB cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (D-Sub - D-Sub, DVI-D - DVI-D), audio cable, setup guide, 4 screws for mount option	AC power cord, signal cables (DVI-D - DVI-D, D-Sub mini 15 pin - D-Sub mini 15 pin), setup guide, 4 screws for mount option (S1503-AF)
Warranty	Five Years	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	-	-	-	-
Dimension Diagrams (Unit:mm)					

Innovative Solutions

Built-In Calibration Sensors




Automatically calibrates while you work

IP Decoding Monitors



In-House Optical Bonding

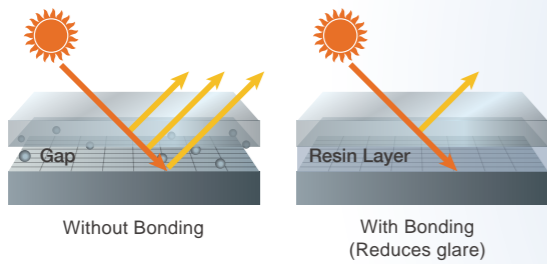

Market-Focused Cloud Solutions



Visual Technology Company



FlexScan

Business Enterprise



ColorEdge

Creative Work



CuratOR / RadiForce

Healthcare



DuraVision

Security & Surveillance / Maritime



Raptor / Re/Vue / SafeGuard

Air Traffic Control



FORIS

Home Entertainment

Integrated Approach



Celebrating the Past
Visualizing the Future



Global Reach



Research and Development



Manufacturing



Quality Control




Customization

Software for Improved Workflow



Use a single mouse across two PCs

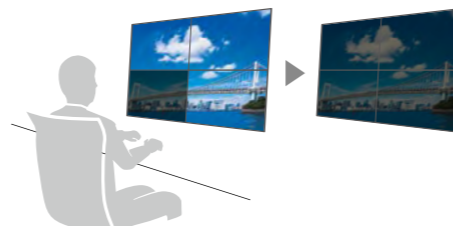

Synchronized adjustment of multiple monitors



Simplified CMS with automatic software and printer settings adjustment

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6794 Fax:+81-76-277-6793

www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, ScreenManager Pro, RadiForce, RadiCS, RadiNET, CuratOR, FlexScan, ColorEdge, DuraVision, FORIS and Raptor are registered trademarks of EIZO Corporation. EIZO EcoView Net, Screen InStyle, and Re/Vue are trademarks of EIZO Corporation. Specifications are subject to change without notice.

Copyright © 2018 EIZO Corporation. All rights reserved.
(180904b)



WORK BETTER